

6.35mm(.250") Wire To Wire And Wire To Board Connector





SPECIFICATIONS:

- Current Rating:15AAC,DC
- Voltage Rating:600V AC,DC
- Operating Temperature:V2:-25°C~+85°C
V0:-40°C~+135°C
- Contact Resistance:10mΩ max.
- Insulation Resistance:1000MΩ Min.
- Withstanding Voltage:5000V AC/minute
- Material:Nylon66 UL94V-2 /UL94V-0
- UL File No:E304945
- Terminal In Housing Retention Force Requirement:2.0kg (Min.)
- GWT:750°C IEC-60335-1

Shenzhen Hongru Connector Co., Ltd

Email:yukyli@hrb-connector.com
Tel: 86-0755 2709 6669
Fax: 86-0755 2709 2392
Skype: haiyuncheng-vivian
Mobile(whatsapp): 86-186 8112 3590
Website: <http://www.hrb-connector.com>

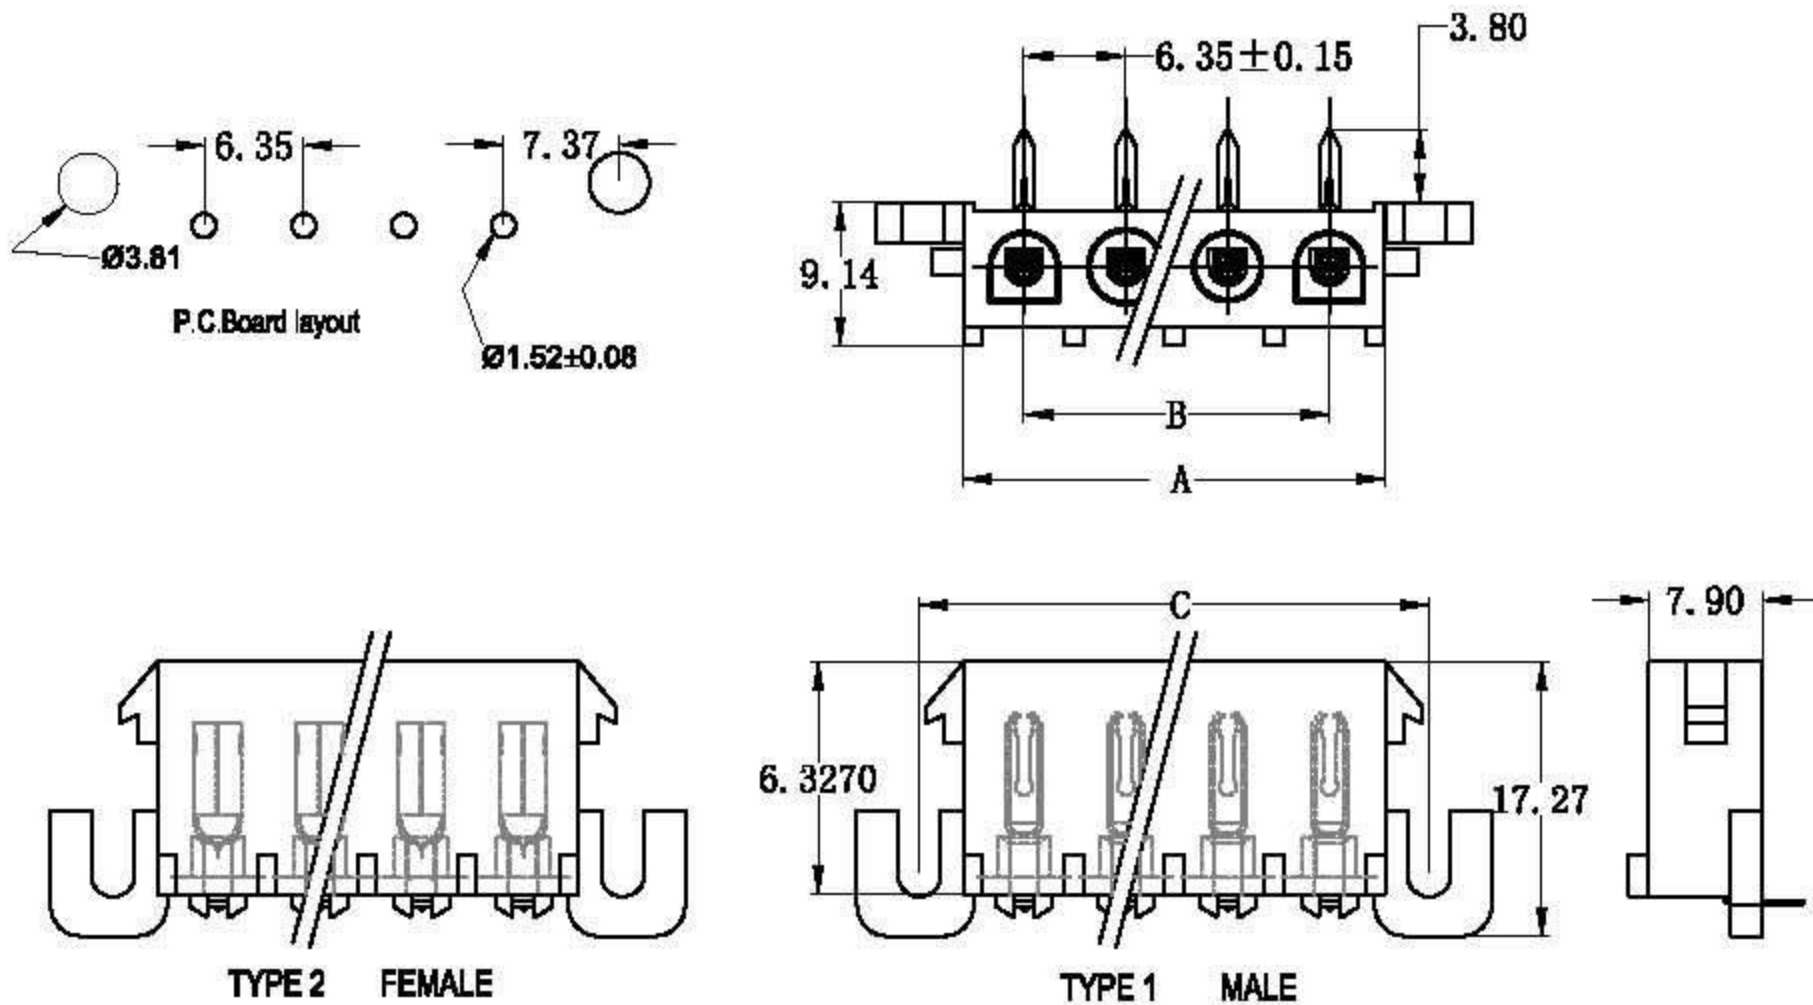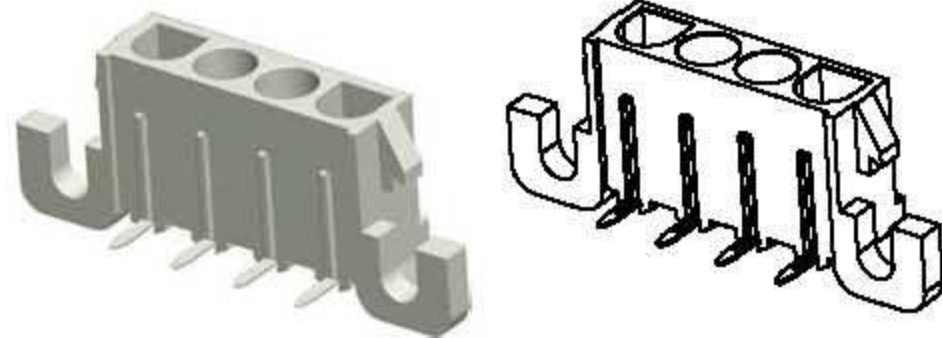

Ordering Information And Dimensions

Part NO.				Circuits	Dimensions		
TYP UL94V-2(Male)	TYP UL94V-0(Male)	TYP UL94V-2(Female)	TYP UL94V-0(Female)		Dim:A	Dim:B	Dim:c
M9848-1x2-N-H(M-L)	M9848-1x2-W-H(M-L)	M9848-1x2-N-H(F-L)	M9848-1x2-W-H(F-L)	2	13.97	6.35	21.08
M9848-1x3-N-H(M-L)	M9848-1x3-W-H(M-L)	M9848-1x3-N-H(F-L)	M9848-1x3-W-H(F-L)	3	20.32	12.70	27.43
M9848-1x4-N-H(M-L)	M9848-1x4-W-H(M-L)	M9848-1x4-N-H(F-L)	M9848-1x4-W-H(F-L)	4	16.67	19.05	33.78
M9848-1x5-N-H(M-L)	M9848-1x5-W-H(M-L)	M9848-1x5-N-H(F-L)	M9848-1x5-W-H(F-L)	5	33.02	25.20	40.13
M9848-1x6-N-H(M-L)	M9848-1x6-W-H(M-L)	M9848-1x6-N-H(F-L)	M9848-1x6-W-H(F-L)	6	39.37	31.75	46.48
M9848-1x7-N-H(M-L)	M9848-1x7-W-H(M-L)	M9848-1x7-N-H(F-L)	M9848-1x7-W-H(F-L)	7	45.72	38.10	52.83
M9848-1x8-N-H(M-L)	M9848-1x8-W-H(M-L)	M9848-1x8-N-H(F-L)	M9848-1x8-W-H(F-L)	8	52.07	44.45	59.18

